MHP13/35

TRAILER MOUNTED BOOM LIFT





- Safe and stable working height of up to 12.6m
- Heavy duty trailer mounted articulated boom lift
- Robust steel platform with two man capacity
- Easy to use outrigger/boom safety interlocks
- Ideal for a wide range of construction, building and maintenance applications



TRAILER MOUNTED BOOM LIFTS MHP13/35


DIMENSIONS	MPH13/35	
Max. working height	12.6m	
Max. platform height (A)	10.6m	
Horizontal outreach	5.6m at 6m	
Platform size	1.25m x 0.78m x 1.07m	
Outrigger footprint	3.7m x 3.9m	
Overall width (outriggers extended)	3.95m	
Overall width (outriggers retracted) (B)	1.58m	
Overall length (C)	5.99m	
Transport height (D)	2.05m	


PERFORMANCE	
Platform capacity	227kg
Platform capacity (with rotator)	200kg
Max. wind speed	12.5m/sec
Max. towing speed	80km/h
Levelling	Mechanical
Turntable rotation	540° non-continuous
Tyres	185 R14
Brakes	Hydraulic disc
Max. axle capacity	1,750kg
Trailer tongue weight	65kg

POWER	
Power source	Honda petrol engine 5.5hp
Hydraulic system	Proportional electro/hydraulic

WEIGHT	
Gross weight	1,360kg

WORKING ENVELOPE

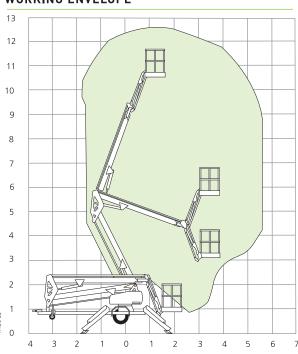



STANDARD FEATURES

- High strength steel boom and base construction
- Proportional speed control
- Heavy duty tow coupling
- Heavy duty jockey wheel
- Hydraulic disc brakes
- Reliable petrol engine
- Versatile jib boom (+70° to -70°)
- Articulating boom sections for 'up & over' reach
- 600V AC rated cable to platform
- Two man steel platform
- Automatic stabilisers
- Outrigger/boom safety interlocks
- Lockable hinged covers
- Hour meter
- Lifting lugs
- Independently operated hydraulic outriggers

OPTIONS

- 360° continuous rotation turntable
- Flashing light
- 110/240V AC GFCI power to platform
- Platform rotator
- Diesel and Bi-energy options



90 Cryers Road, East Tamaki, Auckland 2163

FREEPHONE: 0800 830 530 PHONE: (09) 274 5944 on Call: 0272 830 535 FAX: (09) 274 5662

EMAIL: sales@up2it.co.nz